


# US TYPE FORGED TURNBUCKLE WITH HOOK & EYE

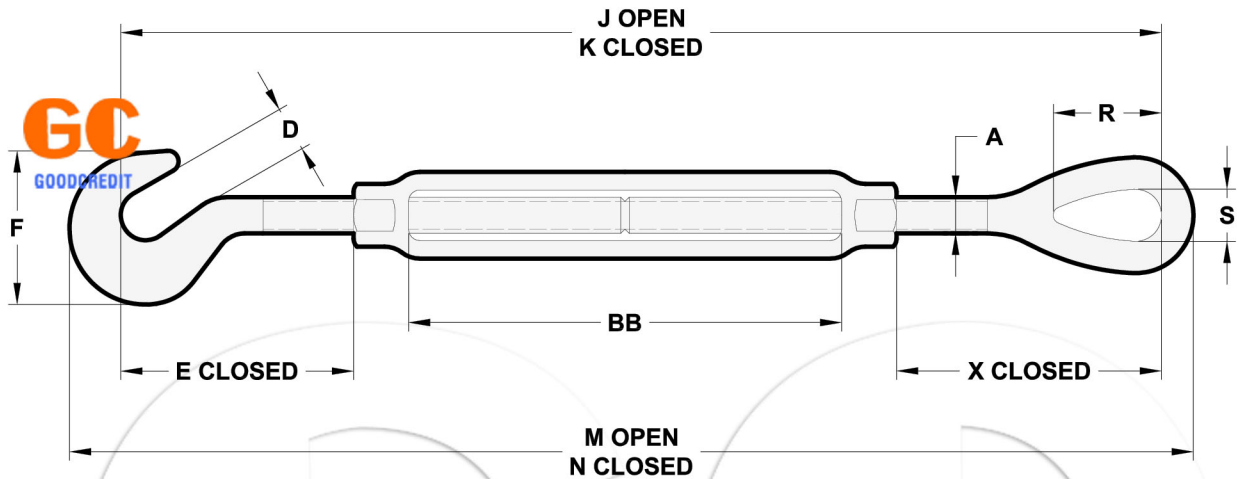

- Meet Performance requirements of US Fed. Spec. FF-T-791b, Type 1, Form 1, Class 5 and ASTM F-1145
- Material: Carbon 1045 Steel
- Ultimate Load at 5 Times the Working Load Limit
- Finish: Hot Dip Galvanized according to ASTM A153
- Packing available with Carton Box or Gunny Bag

Thread Dia. & Take Up (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)											
			A	D	E Closed	F	J Open	K Closed	M Open	N Closed	R	S	X Closed	BB
1/4 x 4	400	0.29	0.25	0.45	1.59	1.27	11.46	7.46	12.09	8.09	0.78	0.34	1.75	4
5/16 x 4-1/2	700	0.49	0.31	0.50	1.94	1.5	13.19	8.69	13.47	9.47	0.94	0.44	2.09	4.5
3/8 x 6	1000	0.78	0.38	0.56	2.3	1.77	16.98	10.98	17.94	11.94	1.12	0.53	2.52	6
1/2 x 6	1500	1.61	0.50	0.65	2.94	2.28	19.45	12.45	20.67	13.67	1.44	0.72	3.23	6
1/2 x 12	1500	2.26	0.50	0.65	2.94	2.28	31.45	18.45	32.67	19.67	1.44	0.72	3.23	12
5/8 x 6	2250	2.70	0.63	0.90	3.69	2.81	21.96	13.96	22.72	15.47	1.75	0.88	3.9	6
5/8 x 12	2250	3.78	0.63	0.90	3.69	2.81	33.21	19.96	34.72	21.47	1.75	0.88	3.9	12
3/4 x 6	3000	3.89	0.75	0.98	4.52	3.33	23.13	15.63	24.95	17.45	2.09	1	4.69	6
3/4 x 12	3000	5.83	0.75	0.98	4.52	3.33	35.13	21.63	36.95	23.45	2.09	1	4.69	12
3/4 x 18	3000	6.33	0.75	0.98	4.52	3.33	47.13	27.63	48.95	29.45	2.09	1	4.69	18
7/8 x 12	4000	8.1	0.88	1.13	5.19	3.78	36.53	22.78	38.66	24.91	2.38	1.25	5.1	12
1 x 12	5000	11.93	1.00	1.25	5.84	4.25	38.8	24.8	41.2	27.2	3	1.44	6.36	12
1 x 18	5000	14	1.00	1.25	5.84	4.25	50.8	30.8	53.2	33.2	3	1.44	6.36	18
1 x 24	5000	17.25	1.00	1.25	5.84	4.25	62.8	36.8	65.2	39.2	3	1.44	6.36	24
1 -1/4 x 12	6500	19	1.25	1.50	7.22	5.13	41.63	27.13	44.56	30.06	3.56	1.81	7.72	12
1 -1/4 x 18	6500	23	1.25	1.50	7.22	5.13	53.63	33.13	56.56	36.06	3.56	1.81	7.72	18
1 -1/4 x 24	6500	24	1.25	1.50	7.22	5.13	65.63	39.13	68.56	42.06	3.56	1.81	7.72	24
1 -1/2 x 12	7500	27.5	1.5	1.88	8.34	5.75	44.72	29.72	47.72	32.72	4.06	2.12	8.62	12
1 -1/2 x 18	7500	31	1.5	1.88	8.34	5.75	59.72	35.72	59.72	38.72	4.06	2.12	8.62	18
1 -1/2 x 24	7500	37.5	1.5	1.88	8.34	5.75	71.72	41.72	71.72	44.72	4.06	2.12	8.62	24