
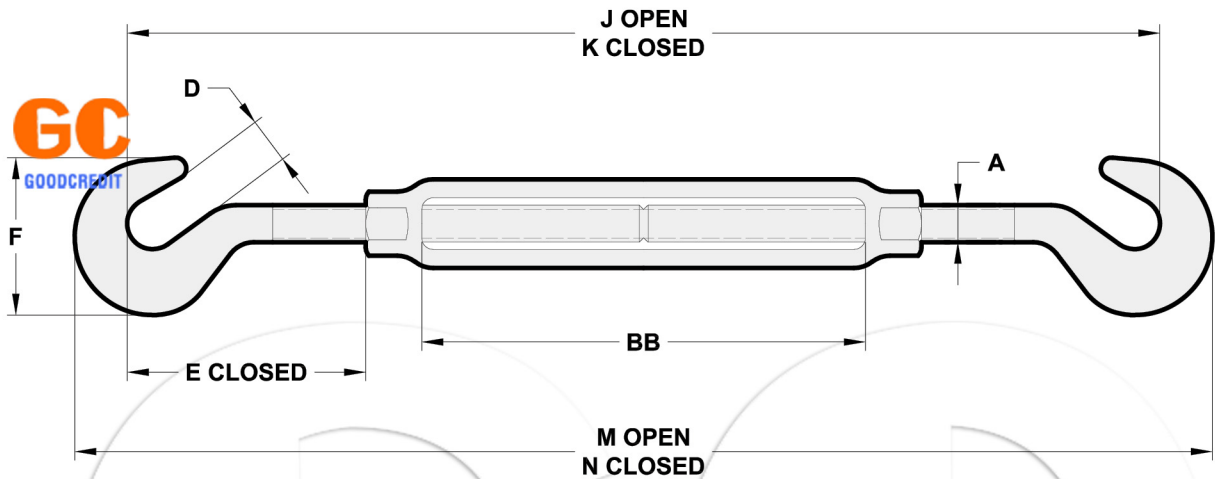


US TYPE FORGED TURNBUCKLE WITH HOOK & HOOK

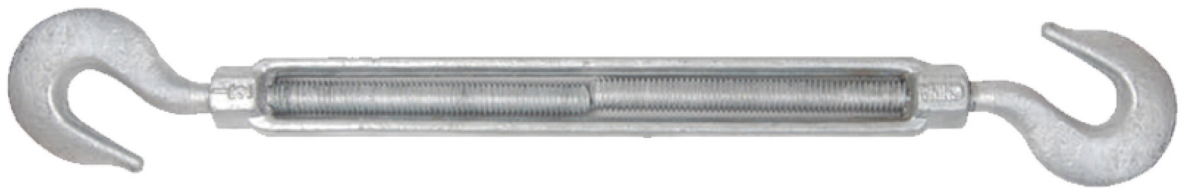

- Meet Performance requirements of US Fed. Spec. FF-T-791b, Type 1, Form 1, Class 5 and ASTM F-1145
- Material: Carbon 1045 Steel
- Ultimate Load at 5 Times the Working Load Limit
- Finish: Hot Dip Galvanized according to ASTM A153
- Packing available with Carton Box or Gunny Bag

Thread Dia. & Take Up (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)								
			A	D	E Closed	F	J Open	K Closed	M Open	N Closed	BB
1/4 x 4	400	0.3	0.25	0.45	1.59	1.27	11.12	7.12	11.94	7.94	4
5/16 x 4-1/2	700	0.47	0.31	0.50	1.94	1.5	12.81	8.31	13.81	9.31	4.5
3/8 x 6	1000	0.78	0.38	0.56	2.3	1.77	16.5	10.5	17.72	11.72	6
1/2 x 6	1500	1.6	0.50	0.65	2.94	2.28	18.82	11.82	20.38	13.38	6
1/2 x 12	1500	2.28	0.50	0.65	2.94	2.28	30.82	17.82	32.38	19.38	12
5/8 x 6	2250	2.75	0.63	0.90	3.69	2.81	20.5	13.25	22.5	15.25	6
5/8 x 12	2250	3.5	0.63	0.90	3.69	2.81	32.5	19.25	34.5	21.25	12
3/4 x 6	3000	3.89	0.75	0.98	4.52	3.33	22.38	14.88	24.78	17.28	6
3/4 x 12	3000	5.43	0.75	0.98	4.52	3.33	34.38	20.88	36.78	23.28	12
3/4 x 18	3000	8.12	0.75	0.98	4.52	3.33	46.38	26.88	48.78	29.28	18
7/8 x 12	4000	8.1	0.88	1.13	5.19	3.78	36	22.25	38.75	25.00	12
1 x 12	5000	11.93	1.00	1.25	5.84	4.25	37.63	23.63	40.69	26.69	12
1 x 18	5000	14	1.00	1.25	5.84	4.25	49.63	29.63	52.69	32.69	18
1 x 24	5000	17.25	1.00	1.25	5.84	4.25	61.63	35.63	64.69	38.69	24
1 -1/4 x 12	6500	20.58	1.25	1.50	7.22	5.13	40.44	25.94	44.06	29.56	12
1 -1/4 x 18	6500	23	1.25	1.50	7.22	5.13	52.44	31.94	56.06	35.56	18
1 -1/4 x 24	6500	27	1.25	1.50	7.22	5.13	64.44	37.94	68.06	41.56	24
1 -1/2 x 12	7500	27.5	1.5	1.88	8.34	5.75	43.94	28.94	47.44	32.44	12
1 -1/2 x 18	7500	31	1.5	1.88	8.34	5.75	55.96	34.94	59.44	38.44	18
1 -1/2 x 24	7500	37.5	1.5	1.88	8.34	5.75	67.94	40.94	71.44	44.44	24