
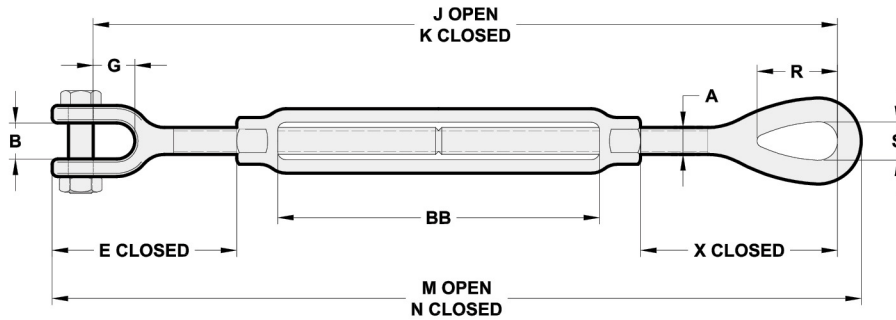


US TYPE FORGED TURNBUCKLE WITH JAW & EYE

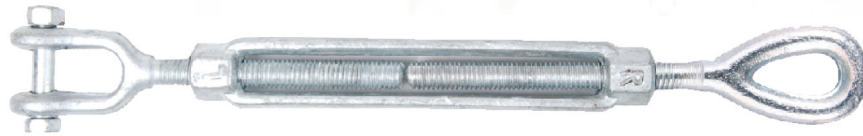

- Meet Performance requirements of US Fed. Spec. FF-T-791b, Type 1, Form 1, Class 5 and ASTM F-1145
- Material: Carbon 1045 Steel
- Ultimate Load at 5 Times the Working Load Limit
- Finish: Hot Dip Galvanized according to ASTM A153
- Packing available with Carton Box or Gunny Bag

Thread Dia. & Take Up (in)	Working Load Limit (lbs)	Weight Each (lbs)	Dimensions (in)											
			A	B	E Closed	G	J Open	K Closed	M Open	N Closed	R	S	X Closed	BB
1/4 x 4	500	0.33	0.25	0.25	1.66	0.64	11.57	7.57	12.28	12.28	0.81	0.34	1.76	4.07
5/16 x 4-1/2	800	0.52	0.52	0.31	2.02	0.87	13.50	9.00	14.30	14.30	0.95	0.44	2.20	4.58
3/8 x 6	1200	0.80	0.80	0.38	2.11	0.85	16.91	10.91	17.87	17.87	1.13	0.53	2.48	6.10
1/2 x 6	2200	1.77	1.77	0.50	3.22	1.07	19.30	13.30	20.48	20.48	1.41	0.71	3.56	6.03
1/2 x 9	2200	2.25	2.25	0.50	3.20	1.07	25.59	16.59	26.77	26.77	1.41	0.71	3.54	9.36
1/2 x 12	2200	2.67	2.67	0.50	3.20	1.07	31.59	19.59	32.77	32.77	1.41	0.71	3.54	12.36
5/8 x 6	3500	2.98	2.98	0.63	3.90	1.32	20.73	14.73	22.27	22.27	1.80	0.88	4.35	6.03
5/8 x 9	3500	3.72	3.72	0.63	3.89	1.32	27.07	18.07	28.61	28.61	1.80	0.88	4.34	9.39
5/8 x 12	3500	4.35	4.35	0.63	3.89	1.32	33.07	21.07	34.61	34.61	1.80	0.88	4.34	12.39
3/4 x 6	5200	4.51	4.51	0.75	4.71	1.52	22.17	16.17	24.09	24.09	2.09	1.00	5.12	6.13
3/4 x 9	3500	5.56	5.56	0.75	4.68	1.52	28.57	19.57	30.49	30.49	2.09	1.00	5.09	9.59
3/4 x 12	3500	6.42	6.42	0.75	4.68	1.52	34.57	22.57	36.49	36.49	2.09	1.00	5.09	12.59
3/4 x 18	3500	8.14	8.14	0.75	4.71	1.52	46.57	28.57	48.49	48.49	2.09	1.00	5.12	18.53
7/8 x 12	7200	9.10	9.10	0.88	5.50	1.77	35.68	23.68	37.91	37.91	2.38	1.25	5.79	12.16
7/8 x 18	7200	11.6	11.6	0.88	5.50	1.77	48.15	30.15	50.38	50.38	2.38	1.25	5.79	18.63
1 x 6	10000	10.0	10.0	1.00	6.09	2.05	25.03	19.03	27.59	27.59	3.00	1.43	6.50	6.18
1 x 12	10000	13.4	13.4	1.00	6.09	2.05	37.03	25.03	39.59	39.59	3.00	1.43	6.50	12.18
1 x 18	10000	16.7	16.7	1.00	6.09	2.05	49.03	31.03	51.59	51.59	3.00	1.43	6.50	18.18
1 x 24	10000	20.6	20.6	1.00	6.06	2.05	61.63	37.63	64.19	64.19	3.00	1.43	6.47	24.84
1-1/4 x 12	15200	20.9	20.9	1.84	8.09	2.82	40.76	28.76	43.98	43.98	3.59	1.82	8.49	12.06
1-1/4 x 18	15200	24.8	24.8	1.84	8.09	2.82	52.76	34.76	55.98	55.98	3.59	1.82	8.49	18.06
1-1/4 x 24	15200	28.8	28.8	1.84	8.09	2.82	65.32	41.32	68.54	68.54	3.59	1.82	8.49	24.62
1-1/2 x 12	21400	30.6	30.6	2.06	8.93	2.81	42.50	30.50	46.21	46.21	4.09	2.12	9.46	12.32
1-1/2 x 18	21400	36.0	36.0	2.06	8.93	2.81	54.50	36.50	58.21	58.21	4.09	2.12	9.46	18.32
1-1/2 x 24	21400	41.5	41.5	2.06	8.93	2.81	67.12	43.12	70.83	70.83	4.09	2.12	9.46	24.94
1-3/4 x 18	28000	52.1	52.1	2.60	9.36	3.35	55.37	37.37	59.77	59.77	4.65	2.38	9.97	18.37
1-3/4 x 24	28000	59.7	59.7	2.60	9.36	3.35	67.37	43.37	71.77	71.77	4.65	2.38	9.97	24.37
2 x 24	37000	89.9	89.9	2.62	11.80	3.74	72.66	48.66	77.95	77.95	5.81	2.69	13.03	24.48
2-1/2 x 24	60000	158	158	3.06	13.26	4.44	76.08	52.08	82.68	82.68	6.49	3.12	13.76	24.60
2-3/4 x 24	75000	197	187	3.69	14.92	4.19	78.05	54.05	85.67	85.67	7.00	3.25	15.09	24.65