


# US TYPE MASTER LINK ASSEMBLY A345

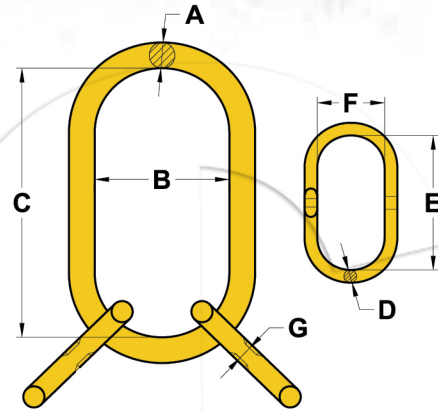

Size		Weight Each (kg)	Working Load Limit Based on 5:1 Design Factor (lbs.)	Proof Load (lbs.)	Dimensions (in.)						
(in.)	(mm)				A	B	C	D	E	F	G
3/4	19	1.59	12300	28400	0.73	3.20	6.00	0.56	3.35	1.77	0.30
7/8	22	2.18	15200	35200	0.88	3.75	6.38	0.56	3.35	1.77	0.30
1	26	4.22	26000	60000	1.10	4.30	7.50	0.75	3.94	2.36	0.33
1-1/4	32	7.17	39100	90400	1.33	5.50	9.50	1.00	6.30	3.54	0.51
1-1/2	38	15.47	61000	141200	1.61	5.90	10.50	1.25	7.09	3.94	0.65
1-3/4	44	20.9	84900	212250	1.75	6.00	12.00	1.38	8.00	5.00	0.73
2	51	30.4	102600	256500	2.00	7.00	14.00	1.50	9.00	5.75	-
2-1/2	64	93.4	160000	320000	2.50	8.38	16.00	2.50	16.00	8.38	-
2-3/4	70	128	216900	433800	2.75	9.88	18.00	2.75	18.00	9.88	-
4	102	303	373000	746000	4.00	12.00	24.00	3.50	24.00	12.00	-