


US TYPE STANDARD LEVER TYPE LOAD BINDER L150

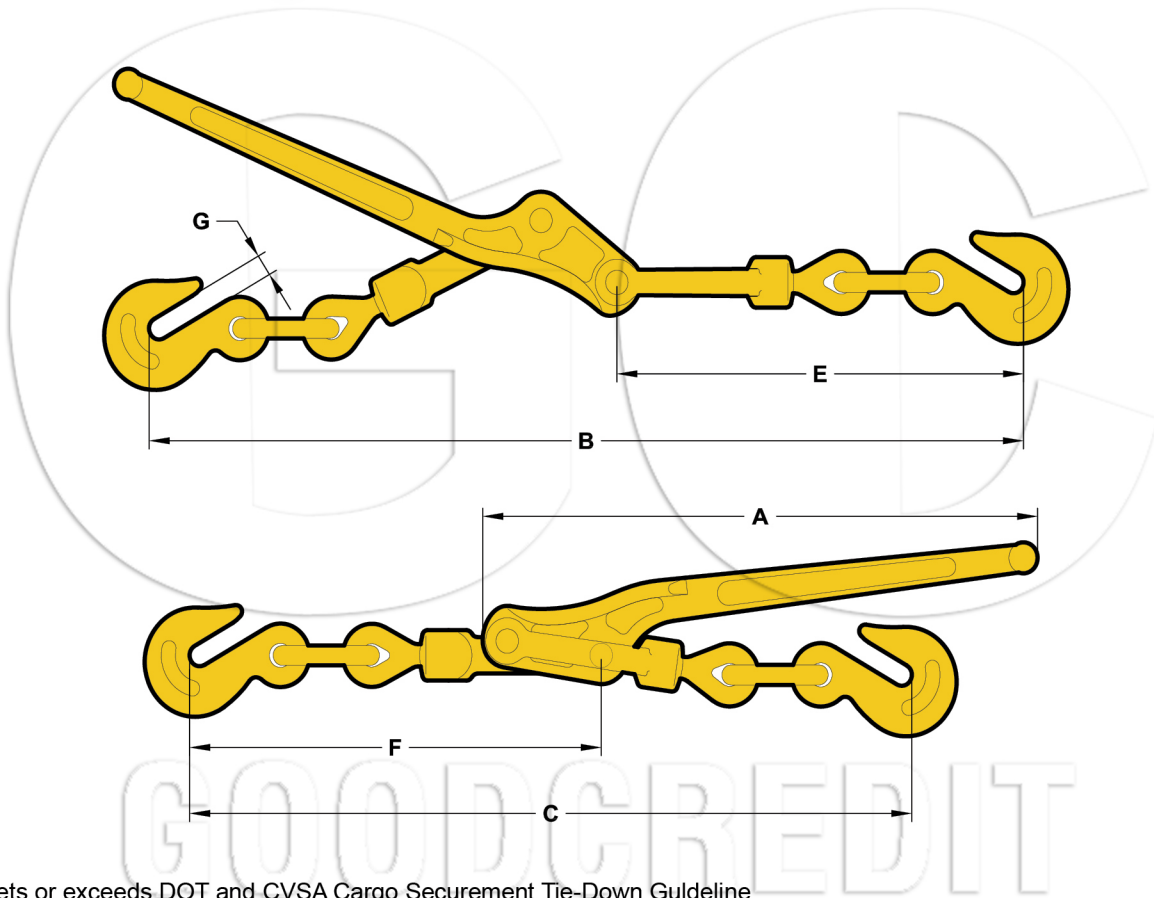

- Meets or exceeds DOT and CVSA Cargo Securement Tie-Down Guideline
- Forged-Quenched and Tempered with 100% Proof Tested
- Powder Coated
- Material Certificates and Testing Certificates available when requested at the time of order
- Packing available with Carton Box

| Size | WLL (lbs) | MBL (lbs) | Weight (lbs) | Dimensions (in) | | | | | |
|----------|-----------|-----------|--------------|-----------------|-------|-------|-------|-------|------|
| | | | | A | B | C | E | F | G |
| 1/4 | 2600 | 9100 | 3.63 | 12.05 | 17.32 | 14.37 | 8.46 | 8.23 | 0.39 |
| 5/16-3/8 | 5400 | 19000 | 7.93 | 15.75 | 23.90 | 19.80 | 11.30 | 11.22 | 0.50 |
| 5/16-3/8 | 6600 | 26400 | 8.15 | 15.75 | 24.49 | 20.39 | 11.60 | 11.52 | 0.50 |
| 3/8-1/2 | 9200 | 33000 | 12.56 | 17.36 | 27.36 | 22.24 | 12.80 | 12.76 | 0.65 |
| 1/2-5/8 | 13000 | 46000 | 20.26 | 20.39 | 33.39 | 27.36 | 15.55 | 15.39 | 0.73 |

WARNING Never exceed Working Load Limit