


US TYPE EYE HOIST HOOKS WITH OR WITHOUT LATCH

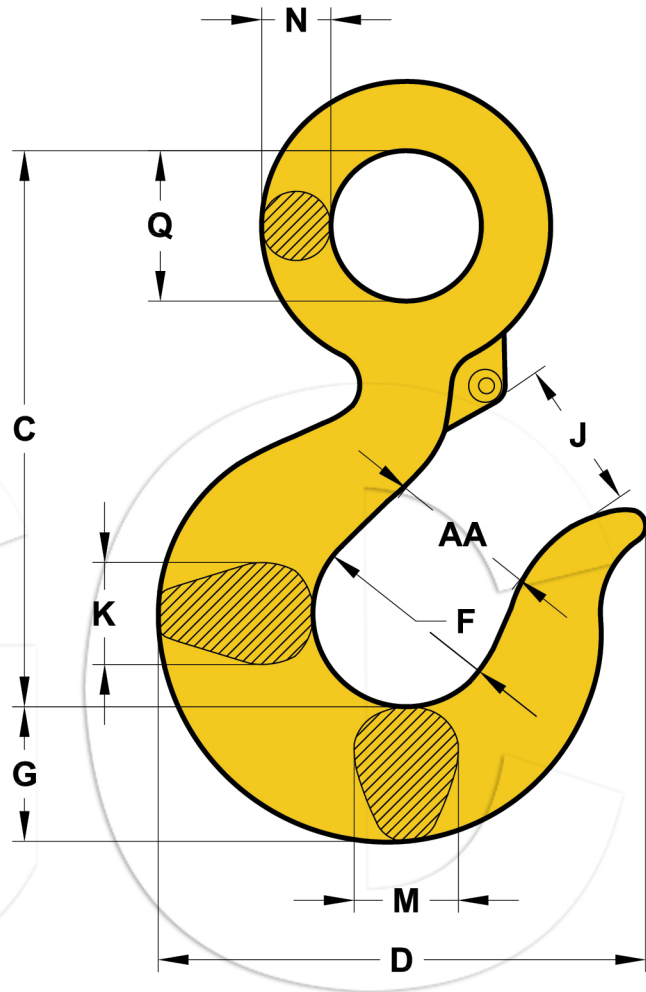

Working Load Limit (t)		Weight Each (lbs.)	Dimensions (in.)									
Carbon	Alloy		C	D	F	G	J	K	M	N	Q	AA
3/4	1	0.61	3.34	2.83	1.25	0.73	0.90	0.63	0.63	0.36	0.75	1.50
1	1-1/2	0.89	3.81	3.11	1.38	0.84	0.93	0.71	0.71	0.42	0.91	2.00
1-1/2	2	1.44	4.14	3.53	1.50	1.00	1.00	0.88	0.88	0.55	1.13	2.00
2	3	2.07	4.69	3.97	1.63	1.13	1.13	0.94	0.94	0.58	1.25	2.00
3	5	4.30	5.77	4.81	2.00	1.44	1.47	1.31	1.31	0.72	1.56	2.50
5	7	8.30	7.37	6.27	2.50	1.81	1.75	1.66	1.66	0.90	2.00	3.00
7-1/2	11	15.00	9.07	7.45	3.00	2.25	2.29	1.88	1.63	1.11	2.44	4.00
10	15	20.77	10.08	8.30	3.25	2.59	2.50	2.19	1.94	1.27	2.84	4.00
15	22	39.50	12.53	10.30	4.25	3.00	3.30	2.69	2.38	1.56	3.50	5.00
20	30	60.00	14.06	13.62	5.00	3.62	4.00	3.00	3.00	1.75	3.50	6.50
25	37	105.00	18.19	14.06	5.38	4.56	4.25	3.75	3.19	2.00	4.50	7.00
30	45	148.00	20.12	15.44	6.00	5.06	4.75	4.50	3.25	2.18	4.94	8.00
40	60	228.00	23.72	18.50	7.00	6.00	5.75	5.50	3.91	2.53	5.69	10.00