


# US TYPE SWIVEL HOOK WITH LATCH OR WITHOUT LATCH

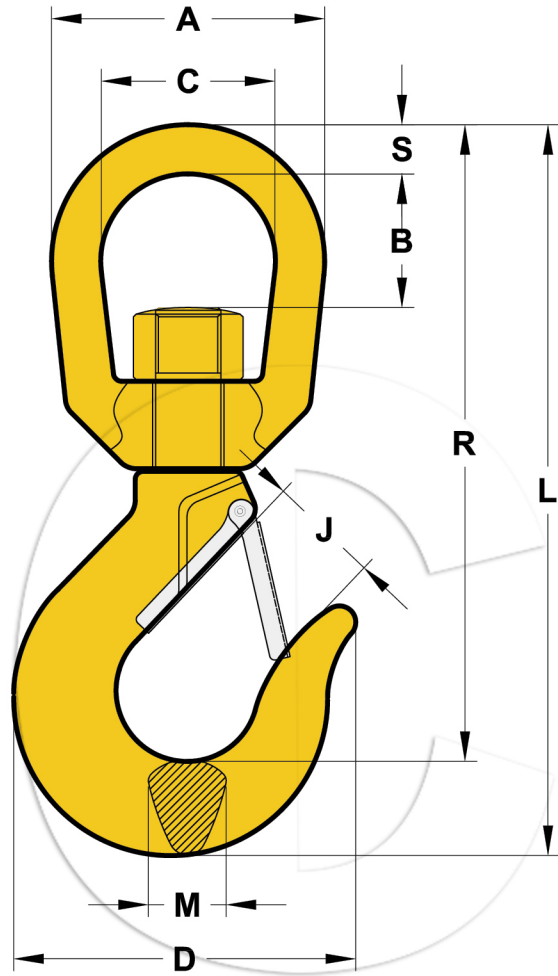

Working Load Limit (t)		Weight Each (lbs.)	Dimensions (in.)								
Carbon	Alloy		A	B	C	D	J	L	M	R	S
3/4	1	0.75	2.00	0.82	1.25	2.86	0.93	5.66	0.63	4.55	0.38
1	1-1/2	1.25	2.50	1.31	1.50	3.15	0.97	6.71	0.71	5.37	0.50
1-1/2	2	2.25	3.00	1.50	1.75	3.56	1.06	7.75	0.88	6.12	0.63
2	3	2.30	3.00	1.50	1.75	4.00	1.19	8.25	0.94	6.50	0.63
3	5	4.96	3.50	1.64	2.00	4.84	1.50	9.69	1.13	7.50	0.75
5	7	10.29	4.56	2.29	2.50	6.28	1.78	12.47	1.44	9.63	1.00
7-1/2	11	19.40	5.00	2.44	2.75	7.54	2.41	14.75	1.63	11.37	1.13
10	15	23.25	5.62	2.48	3.12	8.34	2.62	16.40	1.94	12.25	1.25
15	22	47.00	7.10	3.76	4.10	10.34	3.41	21.34	2.38	16.71	1.50
-	30	70.50	7.10	3.76	4.10	13.62	4.00	23.25	3.00	18.01	1.50