


D RING WITH STRAP, TYPE B

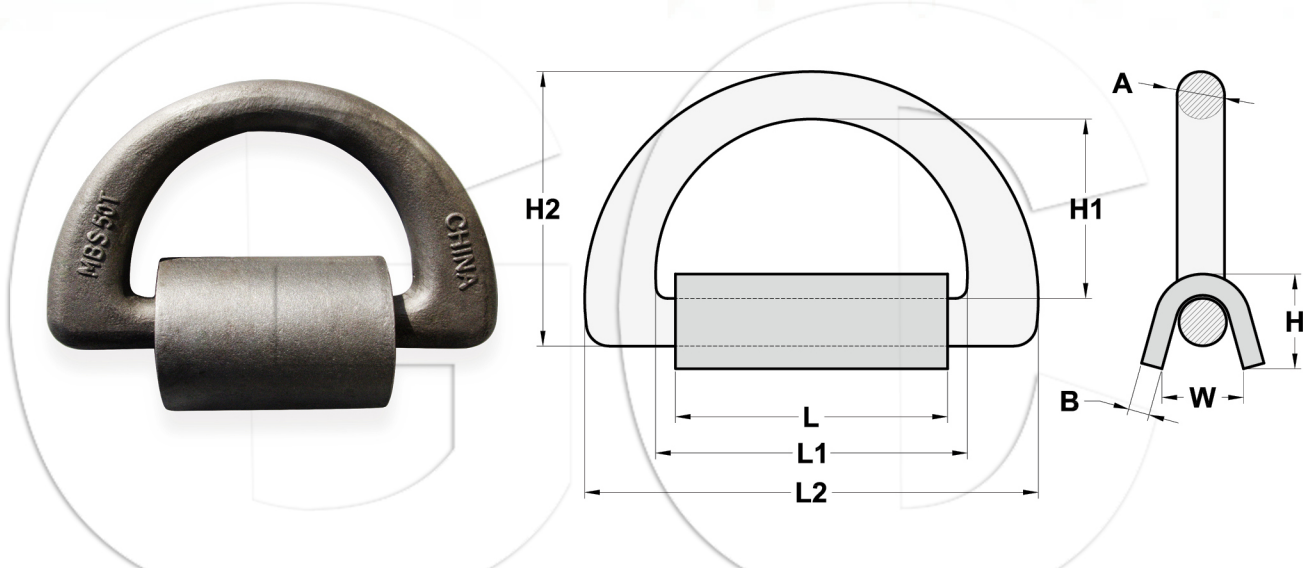

| Size | Working Load Limit (T) | Proof Test (T) | Minimum Breaking Strngth (T) | Weight Each (lbs.) | Dimensions (mm) | | | | | | | | |
|------|------------------------|----------------|------------------------------|--------------------|-----------------|---------|-----|---------|-----|----|----|----|----|
| | | | | | L | L1 (±1) | L2 | H1 (±1) | H2 | H | B | W | A |
| 20T | 5 | 7.5 | 20 | 2.21 | 90 | 120 | 170 | 70 | 102 | 30 | 10 | 42 | 16 |
| 36T | 9 | 13.5 | 36 | 5.42 | 120 | 136 | 212 | 80 | 122 | 35 | 10 | 42 | 21 |
| 41T | 10.5 | 15.4 | 41 | 8.15 | 125 | 144 | 225 | 88 | 138 | 43 | 12 | 62 | 25 |
| 50T | 18.75 | 18.75 | 50 | 9.71 | 130 | 151 | 241 | 90 | 144 | 48 | 14 | 65 | 27 |