


# D RING WITH STRAP & BEND

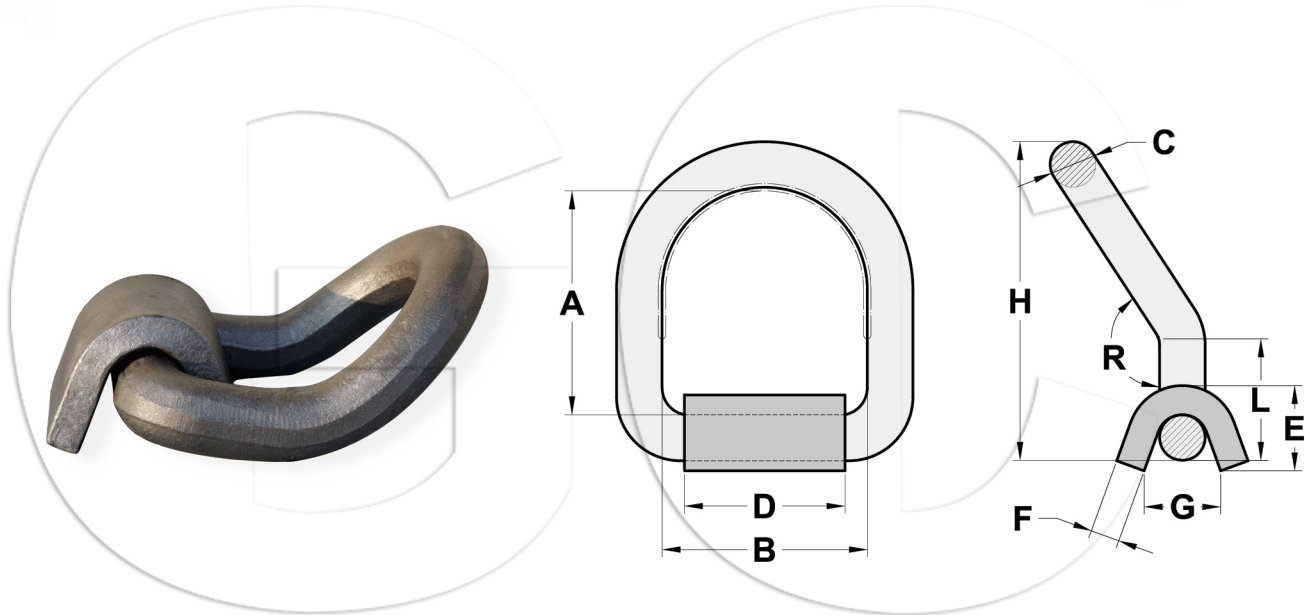

| Size (in.) | Minimum Breaking Strength (lbs.) | Weight Each (lbs.) | Dimensions (mm) |    |    |      |    |     |    |     |    |      |  |
|------------|----------------------------------|--------------------|-----------------|----|----|------|----|-----|----|-----|----|------|--|
|            |                                  |                    | A               | B  | C  | D    | E  | F   | G  | H   | L  | R    |  |
| 1          | 47000                            | 4.21               | 75              | 75 | 25 | 63.5 | 41 | 9.5 | 63 | 125 | 80 | 135° |  |
| 1          | 47000                            | 4.74               | 100             | 75 | 25 | 63.5 | 41 | 9.5 | 63 | 150 | 80 | 135° |  |