
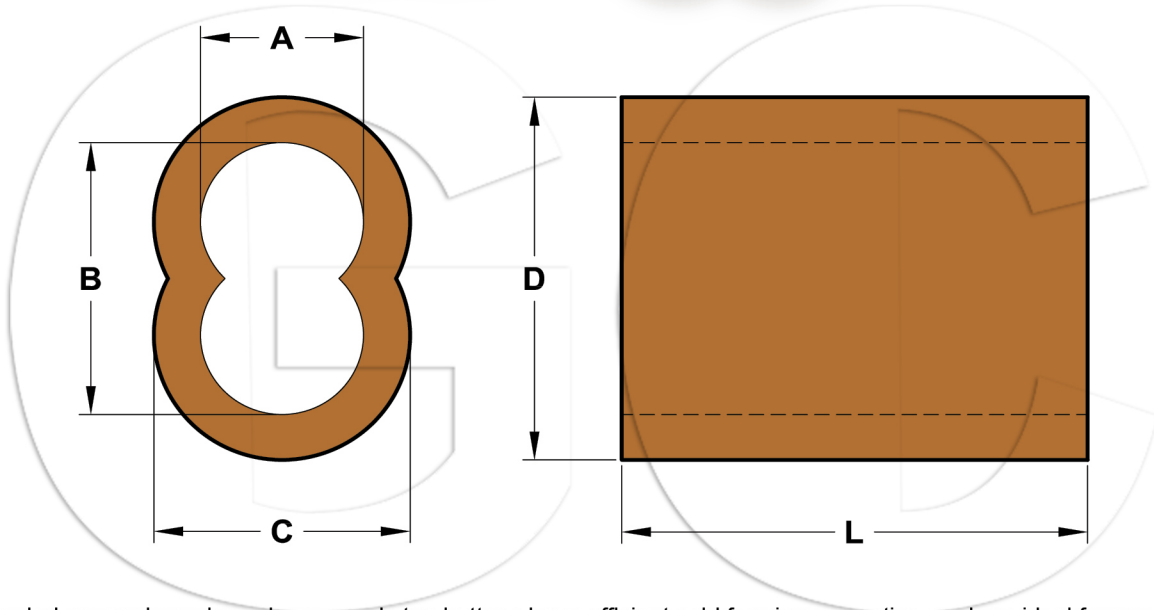


US TYPE COPPER HOURGLASS SLEEVES

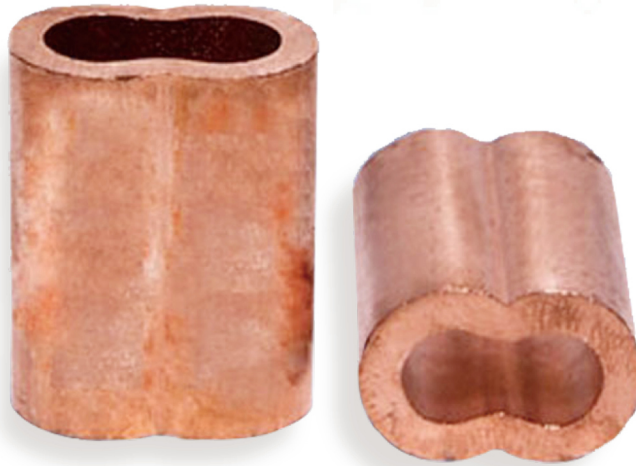

- Extruded copper hourglass sleeves and stop buttons have efficient cold forming properties, and are ideal for non-rusting permanent splices. These sleeves and buttons are 99% pure copper, and the mass of copper provides excellent holding strength.
- Return eye splice using copper hourglass sleeves will attain 95% of Improved Plow wire rope catalog strength when properly swaged.
- CAUTION: Return eye slings using copper hourglass sleeves must be properly swaged to attain strength.

Size (in)	Weight Per 1000 (kg)	Dimensions (mm)				
		A	B	C	D	L
3/64	1.12	1.59	3.18	3.57	5.16	9.50
1/16	1.43	2.06	4.05	4.36	6.35	9.70
5/64	2.61	2.45	4.85	5.55	7.95	10.70
3/32	4.39	3.35	6.55	7.05	10.25	11.50
1/8	8.20	3.97	8.33	8.33	12.69	14.30
5/32	11.07	4.80	9.55	9.56	14.31	15.90
3/36	20.63	5.64	11.20	11.08	16.64	22.20
7/32	22.58	6.60	13.00	11.90	18.30	22.20
1/4	38.32	7.42	14.65	13.62	20.85	28.40
5/16	60.59	9.58	18.35	17.38	26.15	28.40
3/8	81.72	11.15	21.50	18.15	28.50	38.10
7/16	129.00	12.70	25.40	21.00	33.70	42.80
1/2	183.05	15.10	28.20	24.60	37.70	47.60