


S501 OPEN SWAGE SOCKETS

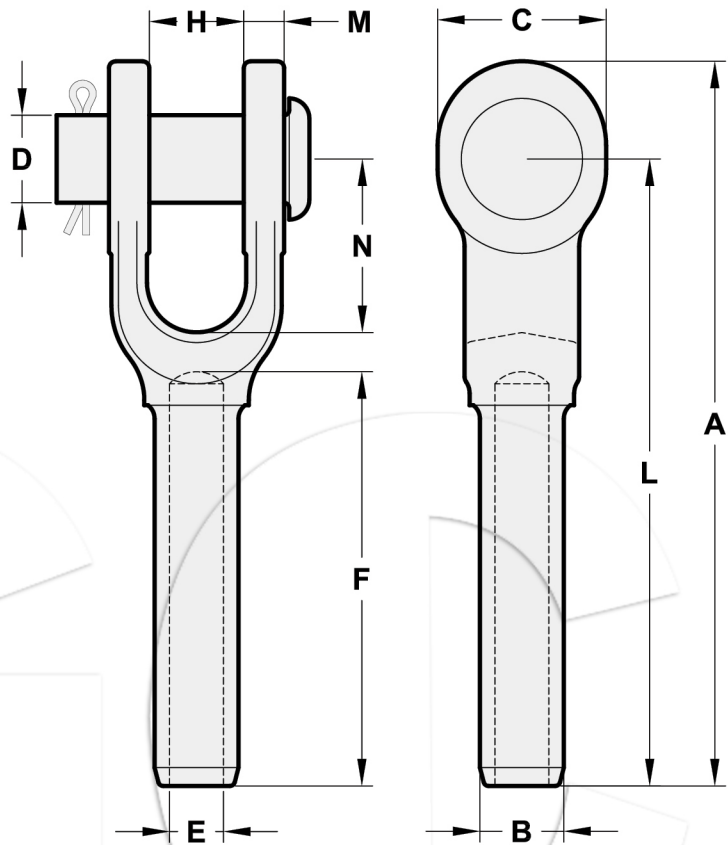

| Wire Rope Size | | Ultimate Load (t) | Weight Each (lbs) | Dimensions (in) | | | | | | | | | |
|----------------|-------|-------------------|-------------------|-----------------|------|------|------|------|-------|------|-------|------|------|
| (in) | (mm) | | | A | B | C | D | E | F | H | L | M | N |
| 1/4 | 6 | 5.4 | 0.52 | 4.78 | 0.50 | 1.38 | 0.69 | 0.27 | 2.19 | 0.69 | 4.00 | 0.38 | 1.47 |
| 5/16 | 8 | 11.8 | 1.12 | 6.30 | 0.78 | 1.62 | 0.81 | 0.34 | 3.25 | 0.80 | 5.34 | 0.48 | 1.67 |
| 3/8 | 9-10 | 13.6 | 1.30 | 6.30 | 0.78 | 1.62 | 0.81 | 0.41 | 3.25 | 0.80 | 5.34 | 0.48 | 1.67 |
| 7/16 | 11-12 | 18.1 | 2.08 | 7.82 | 1.01 | 2.00 | 1.00 | 0.49 | 4.31 | 1.00 | 6.69 | 0.56 | 1.96 |
| 1/2 | 13 | 21.3 | 2.08 | 7.82 | 1.01 | 2.00 | 1.00 | 0.55 | 4.31 | 1.00 | 6.69 | 0.56 | 1.96 |
| 9/16 | 14 | 31.8 | 4.67 | 9.54 | 1.27 | 2.38 | 1.19 | 0.61 | 5.38 | 1.25 | 8.13 | 0.68 | 2.21 |
| 5/8 | 16 | 34.9 | 4.51 | 9.54 | 1.27 | 2.38 | 1.19 | 0.68 | 5.38 | 1.25 | 8.13 | 0.68 | 2.21 |
| 3/4 | 18-20 | 43.5 | 7.97 | 11.61 | 1.56 | 2.75 | 1.38 | 0.80 | 6.44 | 1.50 | 10.00 | 0.80 | 2.69 |
| 7/8 | 22 | 51.5 | 11.52 | 13.37 | 1.72 | 3.13 | 1.63 | 0.94 | 7.50 | 1.75 | 11.63 | 0.94 | 3.20 |
| 1 | 24-26 | 71.4 | 17.80 | 15.47 | 2.00 | 3.69 | 2.00 | 1.07 | 8.63 | 2.00 | 13.38 | 1.07 | 3.68 |
| 1-1/8 | 28 | 83.3 | 25.25 | 17.35 | 2.25 | 4.12 | 2.25 | 1.19 | 9.63 | 2.25 | 15.00 | 1.19 | 4.18 |
| 1-1/4 | 32 | 109 | 35.56 | 19.20 | 2.53 | 4.59 | 2.50 | 1.34 | 10.69 | 2.50 | 16.50 | 1.27 | 4.68 |
| 1-3/8 | 34-36 | 136 | 43.75 | 21.10 | 2.81 | 5.25 | 2.50 | 1.46 | 11.88 | 2.41 | 18.13 | 1.46 | 5.25 |
| 1-1/2 | 38-40 | 181 | 58.50 | 23.17 | 3.08 | 5.50 | 2.75 | 1.59 | 12.81 | 3.00 | 19.75 | 1.70 | 5.70 |
| 1-3/4 | 44 | 228 | 88.75 | 26.70 | 3.40 | 6.25 | 3.50 | 1.87 | 15.06 | 3.50 | 23.00 | 2.11 | 6.67 |
| 2 | 48-52 | 272 | 146.2 | 31.15 | 3.94 | 7.80 | 3.75 | 2.12 | 17.06 | 4.00 | 26.75 | 1.81 | 8.19 |