


US TYPE REGULAR NUT EYE BOLTS G291

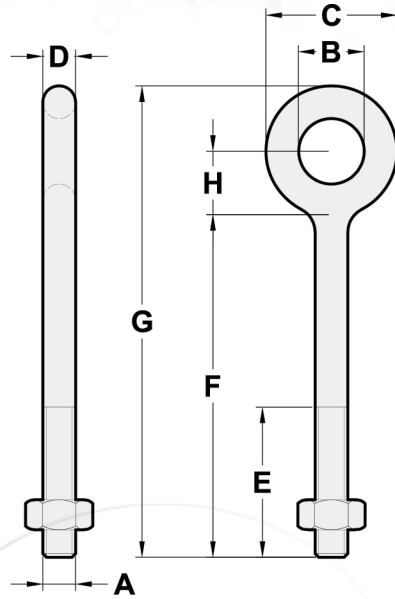

Size (in.)	Working Load Limit (lbs.)	Weight Per 100 (lbs.)	Dimensions (in.)							
			A	B	C	D	E	F	G	H
1/4 x 2	650	8.2	0.25	0.5	1	0.25	1.5	2	3.06	0.56
1/4 x 4	650	11.7	0.25	0.5	1	0.25	2.5	4	5.06	0.56
5/16 x 2-1/4	1200	13.3	0.31	0.62	1.25	0.31	1.5	2.25	3.56	0.69
5/16 x 4-1/4	1200	25	0.31	0.62	1.25	0.31	2.5	4.25	5.56	0.69
3/8 x 2-1/2	1550	23.3	0.38	0.75	1.5	0.38	1.5	2.5	4.12	0.88
3/8 x 4-1/2	1550	29.5	0.38	0.75	1.5	0.38	2.5	4.5	6.12	0.88
3/8 x 6	1550	35.2	0.38	0.75	1.5	0.38	2.5	6	7.62	0.88
1/2 x 3-1/4	2600	50.3	0.5	1	2	0.5	1.5	3.25	5.38	1.12
1/2 x 6	2600	66.1	0.5	1	2	0.5	3	6	8.12	1.12
1/2 x 8	2600	82	0.5	1	2	0.5	3	8	10.12	1.12
1/2 x 10	2600	88	0.5	1	2	0.5	3	10	12.12	1.12
1/2 x 12	2600	114.2	0.5	1	2	0.5	3	12	14.12	1.12
5/8 x 4	5200	103.1	0.62	1.25	2.5	0.62	2	4	6.69	1.44
5/8 x 6	5200	118.2	0.62	1.25	2.5	0.62	3	6	8.69	1.44
5/8 x 8	5200	135.1	0.62	1.25	2.5	0.62	3	8	10.69	1.44
5/8 x 10	5200	153.6	0.62	1.25	2.5	0.62	3	10	12.69	1.44
5/8 x 12	5200	167.1	0.62	1.25	2.5	0.62	4	12	14.69	1.44
3/4 x 4-1/2	7200	168.6	0.75	1.5	3	0.75	2	4.5	7.69	1.44
3/4 x 6	7200	184.5	0.75	1.5	3	0.75	3	6	9.19	1.69
3/4 x 8	7200	207.9	0.75	1.5	3	0.75	3	8	11.19	1.69
3/4 x 10	7200	235	0.75	1.5	3	0.75	3	10	13.19	1.69
3/4 x 12	7200	257.5	0.75	1.5	3	0.75	4	12	15.18	1.69
3/4 x 15	7200	298	0.75	1.5	3	0.75	5	15	18.19	1.69
7/8 x 5	10600	270	0.88	1.75	3.5	0.88	2.5	5	8.75	2
7/8 x 8	10600	308	0.88	1.75	3.5	0.88	4	8	11.75	2
7/8 x 12	10600	400	0.88	1.75	3.5	0.88	4	12	15.75	2
1 x 6	13300	421	1	2	4	1	3	6	10.31	2.31
1 x 9	13300	468.5	1	2	4	1	4	9	13.31	2.31
1 x 12	13300	540	1	2	4	1	4	12	16.31	2.31
1 x 18	13300	650	1	2	4	1	7	18	22.31	2.31
1-1/4 x 8	21000	750	1.25	2.5	5	1.25	4	8	13.38	2.88
1-1/4 x 12	21000	900	1.25	2.5	5	1.25	4	12	17.38	2.88
1-1/4 x 20	21000	1210	1.25	2.5	5	1.25	6	20	25.38	2.88

⚠ WARNING Never exceed Working Load Limit