


US TYPE CLEVIS SLIP HOOK WITH OR WITHOUT LATCH

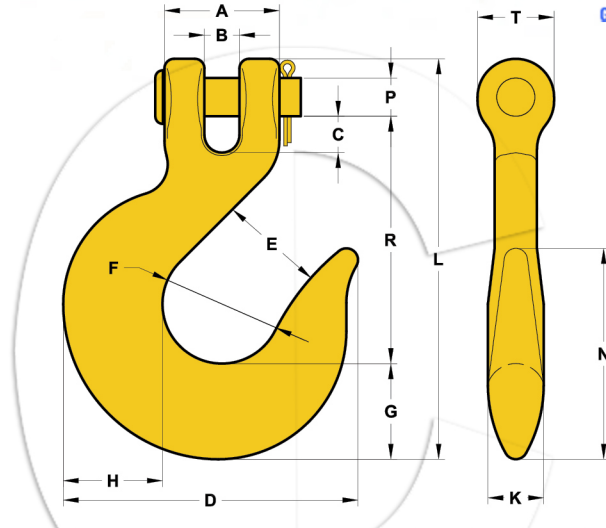

Chain Size (in.)	Working Load Limit (lbs.)		Weight Each (lbs.)	Dimensions (in.)													
	Carbon (G43)	Alloy (G70)		A	B	C	D	E	F	G	H	K	L	N	P	R	T
1/4	1950	2750	0.55	1.06	0.32	0.29	2.75	0.94	0.88	0.81	0.88	0.50	3.95	2.13	0.31	2.58	0.81
5/16	2875	4300	0.79	1.22	0.43	0.34	3.06	1.06	0.97	0.94	1.00	0.56	4.52	2.25	0.38	2.87	0.97
3/8	4000	5250	1.21	1.38	0.48	0.44	3.63	1.31	1.17	1.13	1.19	0.66	5.15	2.56	0.44	3.25	1.06
7/16	5000	7000	2.06	1.73	0.66	0.60	4.34	1.56	1.31	1.38	1.44	0.81	5.97	3.06	0.56	3.70	1.19
1/2	6500	9000	2.75	1.88	0.57	0.53	4.81	1.69	1.53	1.56	1.63	0.91	6.53	3.44	0.63	4.00	1.31
5/8	9250	13500	4.75	2.31	0.71	0.71	5.63	2.00	1.78	1.81	1.94	1.09	7.89	4.00	0.75	4.94	1.56
3/4	-	19250	11.28	3.19	0.94	1.29	7.38	2.50	2.13	2.38	2.50	1.44	10.0	5.06	1.00	6.09	2.09

WARNING Never exceed Working Load Limit