


OVAL-SHAPE REPLACEMENT LINKS

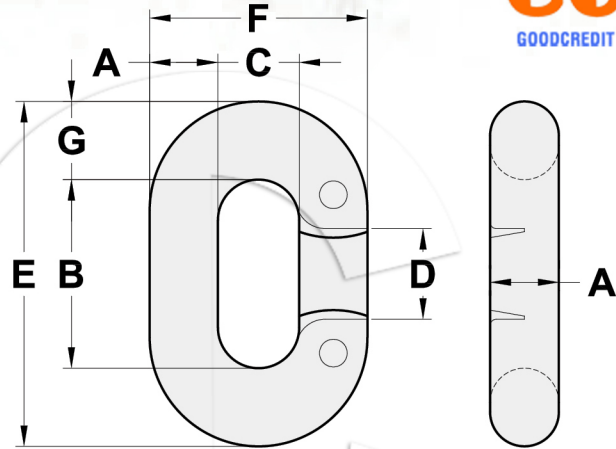

Chain Size (in.)	Working Load Limit (lbs.)	Weight Each (kg)	Dimensions (mm)						
			A	B	C	D	E	F	G
3/16	800	2.5	0.25	0.69	0.34	0.34	1.19	0.78	0.28
1/4	1325	6.25	0.28	0.88	0.44	0.44	1.50	1.00	0.31
5/16	1950	12.5	0.34	0.94	0.47	0.47	1.69	1.16	0.38
3/8	2750	20.0	0.41	1.13	0.56	0.56	2.06	1.38	0.47
7/16	3625	27.5	0.47	1.28	0.59	0.59	2.34	1.53	0.53
1/2	4750	37.5	0.53	1.47	0.66	0.66	2.66	1.72	0.59
5/8	7250	72.5	0.66	1.81	0.78	0.81	3.31	2.09	0.75
3/4	10250	122.5	0.78	2.13	0.94	1.06	3.88	2.50	0.88
7/8	12000	175.0	0.91	2.50	1.13	1.13	4.50	2.94	1.00
1	15500	250.0	1.03	2.75	1.25	1.25	5.00	3.31	1.13

⚠ WARNING Never exceed Working Load Limit