


EUROPEAN TYPE G80 MASTER LINK

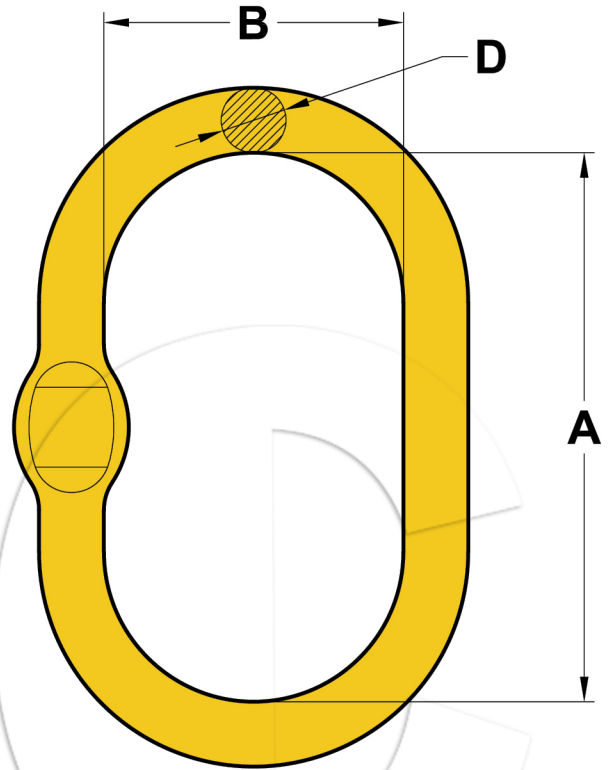

- Standard: EN1677-4 (Supersedes DIN5688-3)
- Available with Alloy Steel
- Forged-Quenched and Tempered
- Finish: Powder Coated
- Ultimate Load at 4 Times the Working Load Limit
- Packing available with Carton Box

Size	G80 EN818-2 Chain		Weight (kg)	Working Load Limit (T)	Dimensions (mm)		
	For 1 Leg (mm)	For 2 Leg (mm)			A	B	D
6-8	7	6	0.34	1.6	110	60	13
7-8	8	7	0.54	2.12	110	60	16
8-8	10	8	0.82	3.15	135	75	18
10-8	13	10	1.5	5.3	160	90	22
13-8	16	13	2.3	8	180	100	26
16-8	18	16	3.95	11.2	200	110	32
18-8	20	18	6.34	14	260	140	36
20-8	22	20	8.96	17	300	160	40
22-8	26	22	12.8	21.2	340	180	45
26-8	32	26	16.55	31.5	350	190	50
32-8	36	32	23.28	45	400	200	56
36-8	40	36	32	56	430	220	63
40-8	45	40	45.76	63	460	250	72
45-8	-	45	62	85.46	500	270	80

WARNING Never exceed Working Load Limit