


DIN1478 RIGGING SCREWS, TYPE JAW AND EYE

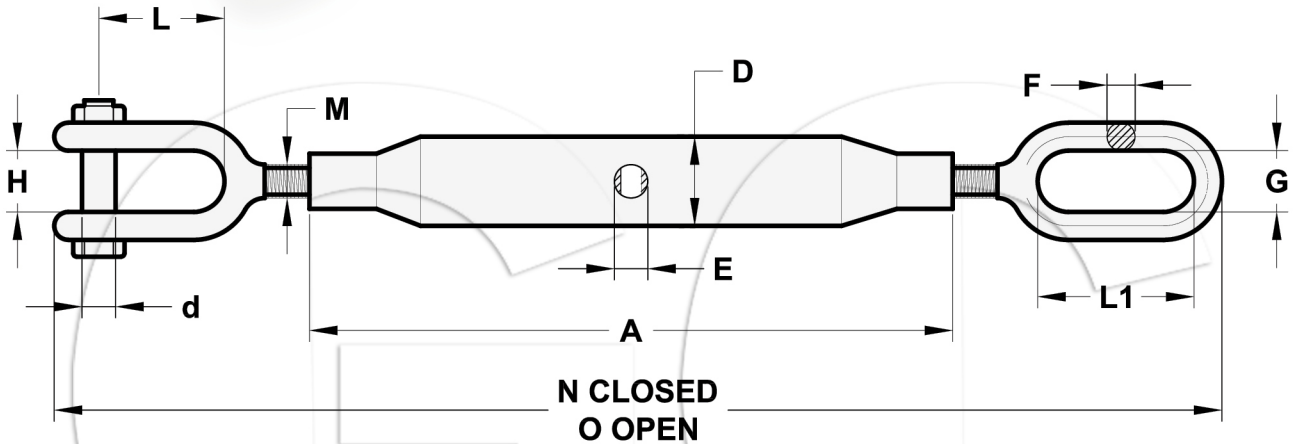

- Meet Performance requirements of DIN1478
- Drop Forged
- Material: Carbon Steel
- Ultimate Load at 4 Times the Working Load Limit
- Finish: Hot Dip Galvanized or Electro-galvanized
- Packing available with Carton Box or Gunny Bag

Size	Weight (kg)	Dimensions (mm)										
		M	A	D	E	H	L	L1	F	d	N Closed	O Open
M6	0.18	M6×1	110	15	6	9	21	14	6	5	197	307
M8	0.363	M8×1.25	110	17	8.5	9	21	20	8	6.5	223	333
M10	0.455	M10×1.5	125	21	8.5	11	21	25	8	8	256	381
M12	0.935	M12×1.75	125	25	10.5	19	35	36	11	10	370	495
M16	1.277	M16×2	170	30	10.5	22	51	40	14	12	393	563
M20	2.114	M20×2.5	200	33.5	12.5	22	48	55	16	16	413	613
M22	3.33	M22×2.5	220	33.5	12.5	25	60	55	17	20	501	721
M24	4.354	M24×3	255	42	12.5	32	65	57	19	22	589	844
M27	5.35	M27×3	255	42	14.5	32	65	57	20	22	593	848
M33	7.43	M33×3.5	255	57	16.5	38	76	64	25	24	645	900
M36	8.63	M36×4	295	63	16.5	38	76	75	26	27	655	950
M42	16.4	M42×4.5	330	70	20.5	47	111	84	27	35	691	1021
M48	19.94	M48×5	355	83	20.5	51	121	94	37	42	813	1168