


# US TYPE EYE SLIP HOOK WITH OR WITHOUT LATCH

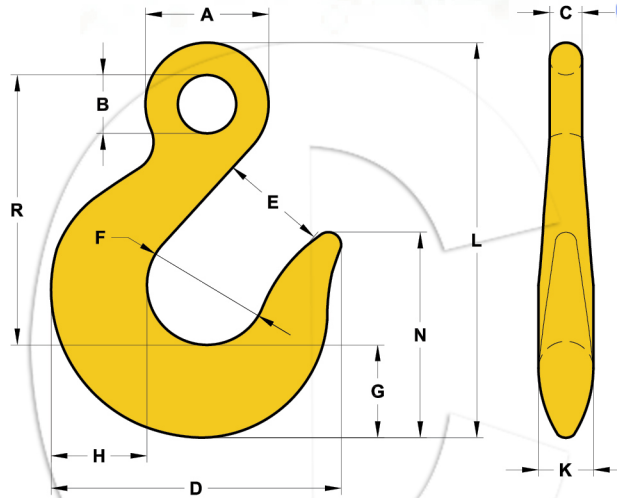

Chain Size (in.)	Working Load Limit (lbs.)		Weight Each (lbs.)	Dimensions (in.)											
	Carbon (G43)	Alloy (G70)		A	B	C	D	E	F	G	H	K	L	N	R
1/4	1950	2750	0.40	1.06	0.50	0.28	2.75	0.94	1.19	0.81	0.88	0.50	3.66	2.13	2.56
5/16	2875	4300	0.64	1.25	0.63	0.34	3.06	1.06	1.25	0.94	1.00	0.56	4.23	2.25	2.95
3/8	4000	5250	1.10	1.53	0.72	0.41	3.63	1.31	1.50	1.13	1.19	0.66	4.89	2.56	3.36
7/16	5000	7000	1.56	1.69	0.81	0.44	4.34	1.56	1.81	1.38	1.44	0.81	5.70	3.06	3.88
1/2	6500	9000	2.09	1.94	0.94	0.50	4.81	1.69	1.94	1.56	1.63	0.91	6.34	3.44	4.28
5/8	9250	13500	3.90	2.38	1.13	0.63	5.63	2.00	2.38	1.81	1.94	1.09	7.86	4.00	5.22
3/4	12500	19250	6.93	2.88	1.38	0.75	6.75	2.13	2.75	2.19	2.31	1.31	8.73	4.75	5.80

**WARNING** Never exceed Working Load Limit